

HCS-5300BAT Lithium Rechargeable Battery Pack



Features

- Lithium rechargeable battery pack
- Used for supplying power to HCS-5300 series digital infrared wireless conference unit

Technical Specifications

Electrical

Nominal voltage.....11.1 V DC
Nominal capacity.....4400 mAh

Mechanical

Dimensions (h x w x d).....28 × 140 × 58 mm
Weight.....0.3 kg
Color.....Black

Ordering Information

HCS-5300BAT.....Lithium Rechargeable Battery Pack
(11.1 V DC, for HCS-5300/01/02 series conference unit)

HCS-ADP15V Power Adapter



Features

- Used for supplying power to HCS-5300 series digital infrared wireless conference unit

Technical Specifications

Electrical

Power supply.....AC 100 V - 240 V, 50 Hz / 60 Hz
Output.....15 V DC, 2.2 A
Connector.....UL, CE or VDE type, according to the sales area


Mechanical

Cable length.....3 m
Dimensions (h x w x d).....28 × 95 × 45 mm
Weight.....0.3 kg
Color.....Black

Ordering Information

HCS-ADP15V.....Power Adapter (15 V DC, 2.2 A)

HCS-5300CHG/08 Charging Unit

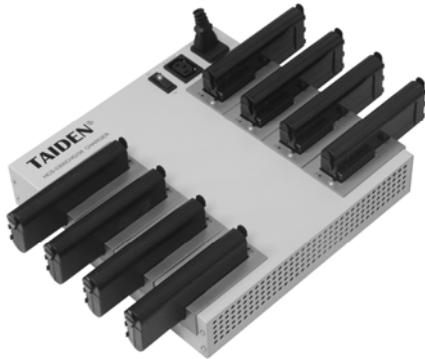

Features

- Used for charging HCS-5300BAT Lithium batteries
- Charges 8 pcs of HCS-5300BAT batteries per charging
- Uses universal power supply with automatic voltage matching

Controls and Indicators

- Power switch
- Charging indicator (red)
- Fully charged indicator (green)

Interconnections

- Power output interface
- Power input interface
- Charging lattices

Technical Specifications

Electrical

Power supply.....AC 100 V-120 V 60 Hz or AC 220 V-240 V 50 Hz
 Power consumption.....Max. 380 W
 Charging time.....Approx 6 hours
 Charging capacity.....8 HCS-5300BAT batteries

Mechanical

Dimensions (h x w x d).....74 × 288 × 300 mm
 Weight.....4.5 kg
 Color.....White

Ordering Information

HCS-5300CHG/08.....Charging Unit (8 pcs/case)

HCS-5352 1×4 Cable Splitter



Features

- Has one in and four out structure
- Each main unit has 6 digital infrared transceiver interfaces, each interface can connect 4 transceivers if operating distributor HCS-5352

Interconnections

- 4 × 6P-DIN sockets
- 2 m cable with 6P-DIN plug

Technical Specifications

Electrical

Voltage.....33 V DC (supplied from HCS-5300M)
 Number of I/O terminals.....1 in / 4 out

Mechanical

Dimensions (h x w x d).....35 × 149 × 90 mm
 Weight.....0.32 kg
 Color.....Black

Ordering Information

HCS-5352.....Cable Splitter (1 input & 4 outputs, for HCS-5300T series)

HCS-5300TZJ Tripod



Features

- Used for mounting HCS-5300TD
- Max. adjustable height: 1.4 m
- Weight: 2.6 kg

Ordering Information

HCS-5300TZJ..... Tripod

CBL5300 Dedicated Transceiver Cable



Features

- Dedicated cable for HCS-5300T series Digital Infrared Transceiver
- 1 × 6P-DIN plug
- 1 × 6P-DIN socket
- Ø 6 mm
- Color: black

Ordering Information

CBL5300-05.....5 m Dedicated Transceiver Cable
 CBL5300-10.....10 m Dedicated Transceiver Cable
 CBL5300-20.....20 m Dedicated Transceiver Cable
 CBL5300-30.....30 m Dedicated Transceiver Cable
 CBL5300-40.....40 m Dedicated Transceiver Cable
 CBL5300-50.....50 m Dedicated Transceiver Cable
 CBL5300-05CMP.....5 m Dedicated Transceiver Cable (CMP)
 CBL5300-10CMP.....10 m Dedicated Transceiver Cable (CMP)
 CBL5300-20CMP.....20 m Dedicated Transceiver Cable (CMP)
 CBL5300-30CMP.....30 m Dedicated Transceiver Cable (CMP)
 CBL5300-40CMP.....40 m Dedicated Transceiver Cable (CMP)
 CBL5300-50CMP.....50 m Dedicated Transceiver Cable (CMP)